## **PCT**

## WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5:
A61M 5/28

(11) International Publication Number: WO 93/09825
(43) International Publication Date: 27 May 1993 (27.05.93)

(21) International Application Number: PCT/CA92/00495

(22) International Filing Date: 13 November 1992 (13.11.92)

(30) Priority data:

791,399 14 November 1991 (14.11.91) US

(71) Applicant: DUOJECT MEDICAL SYSTEMS INC. [CA/ CA]; P.O. Box 600, 305 Knowlton Road, Lac Brome, Quebec J0E 1VO (CA).

(72) Inventor: REYNOLDS, David, L.; P.O. Box 600, 305 Knowlton Road, Lac Brome, Quebec JOE 1VO (CA).

(74) Agent: PARSONS, Richard, A., R.; Ridout & Maybee, 2300 Richmond-Adelaide Centre, 101 Richmond Street West, Toronto, Ontario M5H 2J7 (CA). (81) Designated States: AU, BB, BG, BR, CA, CS, DE, FI, GB, HU, JP, KR, NO, RO, RU, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, SE).


## Published

With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: SYRINGE

## (57) Abstract

A prefilled syringe system is provided for two component pharmaceuticals, which is a combination of a first subassembly consisting of a capped bottomless pharmaceutical vial (2) containing a first component and closed at its bottom end by a piston (32) which can be connected to a plunger (16) and a second subassembly (3) consisting of a shell (4) containing a second component and closed by a further piston (6) and located in telescopable relationship with the plunger, a cap (18) which can be forced onto the cap (36) of the bottomless vial, and a double ended needle (320) or a functionally equivalent cannula assembly which is caused to pierce both pistons as the assemblies are connected by forcing the cap (18) onto the bottomless vial, thus placing the vials in communication. The shell vial (4) is pressed towards the bottomless vial (2) to express its contents into the latter, and the plunger (16) and shell vial (4) are then removed so that the cap (18) and needle (20) are left connected to the bottomless vial (2) and the plunger (16) may be connected to the piston (32) of the bottomless vial to convert it into a syringe. The shell vial may telescope either over or within the plunger. In the first case, the plunger acts to operate the piston of the shell vial during expression of its contents, whereas in the latter case a separate component (8) is required for this purpose.

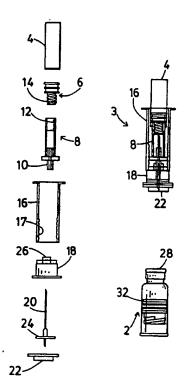

# FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NL	Netherlands
BE.	Belgium	GN	Guinca	NO	Norway
BF	Burkina Faso	GR	Greece	NZ	New Zealand
		HU	Hungary	PL	Poland
BG	Bulgaria	IE.	Ireland	PT	Portuga!
BJ	Benin	ır	Italy	RO	Romania
BR	Brazil	JP	Japan	RU	Russian Federation
CA	Canada	Jr KP	Democratic People's Republic	SD	Sudan
CF	Central African Republic	R.F	of Korea	SE	Sweden
CC	Congo	440	Republic of Korea	SK	Slovak Republic
CH	Switzerland	KR	Kazakhstan	SN	Senegal
CI	Côte d'Ivoire	KZ		su	Soviet Union
CM	Cameroon	IJ	Liechtenstein	TD	Chad
cs	Czechoslovakia -	LK	Sri Lanka	TG	Togo
CZ	Creck Republic	เม	Luxembourg	UA	Ukraine
DΕ	Germany	MC	Monaco	US	United States of America
DK	Denmark	MC	Madagascar	VN	Viet Nam
ES	Spain	Mi.	Mali	VII.	YILL ITAIN
Fi	Finland	MN	Mongolia		

PCT/CA92/00495 WO 93/09825

## - 1 -

## SYRINGE

### TECHNICAL FIELD

This invention relates to prefilled syringe systems 5 for the packaging of pharmaceutical preparations in dosage form, and more particularly to systems in which two components of a preparation, one of which is normally a diluent or solvent, must be stored separately and only admixed immediately prior to administration.

#### 10 BACKGROUND ART

15

25

Our United States Patent No. 5,137,511 describes several syringe systems for the packaging of two component pharmaceutical preparations, of which the system shown in Figures 11 and 12 is presently the most preferred. system stores a solvent or diluent component in a specially formed capsule 14 which is described in detail in that patent.

Shell vials are however a well known and widely available packaging for pharmaceutical diluents. A shell 20 vial differs from a conventional pharmaceutical or serum vial in that it has no neck. Instead the top of the vial is of the same diameter as the remainder of the cylindrical side wall of the vial, and is closed by a piston quite similar to that utilized by the present applicant to close the bottom of its bottomless vial as described in U.S. Patent No. 5,137,511.

## DISCLOSURE OF INVENTION

I have now found that the construction shown in this patent can be advantageously modified to utilize known 30 shell vials in place of the capsule 14.

According to the invention, a prefilled syringe system for two component pharmaceuticals is provided, as set forth in the appended claims 1-5.

5

10

20

## BRIEF DESCRIPTION OF DRAWINGS

Preferred embodiments of the invention are described with reference to the accompanying drawings, in which:

Figures 1A-1I are elevations illustrating successive stages in the assembly and preparation of use of a first embodiment of the invention, it being assumed for ease in illustration that most components other than those of rubber or metal are transparent; and

Figures 2A-2G are elevations illustrating successive stages in the assembly and preparation for use of a second embodiment of the invention.

## BEST MODES FOR CARRYING OUT THE INVENTION

Figure 1A shows an exploded view of the components of a separately assembled and sterilized unit 3 (see Figure 1B) for use in conjunction with a filled and capped vial 2 generally similar to that shown in Figure 12 of U.S. Patent No. 5,137,511. The unit 3 comprises a shell vial having a cylindrical body 4 closed at one end, and a piston 6 to quantity its other end enclose closing pharmaceutical diluent. A moulded plastic tubular adaptor component 8 has a tubular connector 10 at one end similar to the connector element 70 of U.S. Patent No. 5,137,511, and an internal thread 12 within its other end forms a coupling engaged with an external thread on a extension 14 forming a coupling configuration on the piston 6. tubular plunger 16 has an internal thread 17 which can provide a coupling to an integral extension or other coupling configuration on a piston 32 of the vial 2. plunger and a cap 18 are similar to corresponding parts shown in the U.S. patent. The unit further includes a cannula needle 20, and a protective cap 22 which closes the open end of the cap 18 to maintain sterility and provide protection of the needle during storage. The cap 22 is

WO 93/09825 PCT/CA92/00495

- 3 -

removed immediately before use (see Figure 1C). The needle 20 is of the double ended type, and is located beneath the cap 18 by a flange 24. A connector 26 on the cap engages the connector 10 on the adaptor component 8 in the same way as the connector 27 engages the connector 70 in Figure 12 of U.S. Patent No. 5,137,511, so that one end of the needle 20 passes through the adaptor towards the piston extension 14, as seen in Figure 1B.

After the cap 22 has been removed (Figure 1C), as well as a flip-off protective cover 28 on the cap 30 of the vial 2, which protects a rubber closure of the vial held in place by the cap 30 (Figure 1F), the unit 3 is pressed onto the vial 2 (Figure 1F) so that the cap 18 is pressed over the cap 30 of the vial 2 so that the lower end of the needle 20 pierces a rubber closure of the vial 2. At the same time, the flange 24 is pressed upwardly within the cap 18 and causes the upper end of the needle 20 to penetrate a septum within the piston 6.

The shell vial 4 is then pressed downwardly (Figure 7F) expelling its contents through the needle 20 into the vial 2. If necessary, the piston 32 within the vial 2 is positioned higher in the vial than normal so that it can be displaced downwardly to make room for the contents of vial 4 (see Figure 1G).

At this point, the assembly 3, with the exception of the cap 18 and the needle 20, is pulled away from the vial 2 by gripping the plunger 16 leaving the cap and needle in place on the vial (Figure 1G). The thread 17 of plunger 16 is then screwed onto the piston 32 of the vial 2 (Figure 1H) to form a syringe 34 (Figure 1I).

In the embodiment just described, the shell vial is dimensioned so as to fit within the tubular plunger. An

20

alternative embodiment is shown in Figures 2A-G in which the shell vial 4 is dimensioned so that the tubular plunger 16 has an external diameter less than its internal The same reference numerals are used to denote 5 those components of this embodiment which are similar to those of the previous embodiment, and only the differences In this instance, the plunger 16 will be described. fulfils the functions of the adaptor 8, the screw threads on extensions of the pistons 6 and 32 being similar except that the thread 14 on piston 6 may be longer. The plunger 16 is a press fit on the connector 26 on the cap 18, which in this case is formed with a skirt 36 which fits over the top portion of the vial 2 and also provides a finger grip The entire unit 3 (see Figure 2C) is assembled into a tubular sleeve 40 (Figure 2B) which together with the cap 22 maintains sterility of the unit during storage, and also facilitates preparation of the syringe. The vial 4 is a press fit within the upper end of the sleeve 40. removal of the cap 22, the unit 3 is applied to the vial (Figure 2D) as in the previous embodiment, and the sleeve 40 is pulled downwardly (Figure 2E). As before, this forces the cap 18 onto the cap 30 of the vial, causing the needle 20 to pierce both the closure of the vial 2 and the piston 6 of the shell vial 4, and further downward movement 25 of the sleeve 40 forces the contents of the shell vial into At this point the sleeve 40 is rotated to the vial 2. unscrew the piston 6 of the shell vial 4 from the plunger 16 (Figure 2F) which is then transferred to the piston 32 to complete the syringe.

It should be understood that the sleeve 40 could be 30 omitted, although it is a convenience for packaging and manipulating the syringe, in which case the vial 4 would be manipulated directly rather than through the sleeve 40.

Variations in the above embodiments are possible. For some applications of the syringe, it may be desired to replace the needle 20 by some other cannula arrangement when the syringe is used, in which case a single ended needle may be located in the assembly 3 so that it will be forced upwardly as the cap 18 is forced onto the vial 2 (the cap in this case will have an internal cannula to pierce the closure of the vial), but will be retained within the shell vial when the latter is removed during preparation of the syringe. If a double ended needle 30 is used, in combination with a cannula, venting of the vial 2 to permit escape of air displaced by the contents of the shell vial 4 becomes possible, in a manner similar to that shown in Figure 16 of U.S. Patent No. 5,137,511.

٠,

## CLAIMS:


- A prefilled syringe system for two component 1. pharmaceuticals, characterized by the combination of first and second subassemblies, of which the first subassembly comprises a bottomless pharmaceutical vial (2) having a filling neck, a penetrable closure retained on said neck by first annular cap (30), and an open bottom hermetically closed by a first piston (32) with a downwardly facing coupling configuration within the vial, and the second subassembly (3) comprises a shell vial (4) having an open end closed by a second piston (6), a tubular plunger (16) concentric and in telescoping relationship with the shell vial, the plunger having a coupling (17) at subsequent coupling the coupling to for configuration (14) of said first piston (32), a second cap (18) releasably connected to said plunger which can be force fitted to said first cap (30), and cannula means (20) projectable by force fitting of said first cap (30) to said second cap (18) to penetrate both said penetrable closure and said second piston (6) to place said bottomless vial (2) and said shell vial (4) in fluid communication through said cannula means (20) whereby fluid from the shell vial is transferred to the bottomless vial upon telescoping said shell vial relative to said plunger (16).
- 2. A syringe system according to claim 1, characterized in that the shell vial (4) is of a diameter to telescope into said plunger (16), and adaptor means (8) are provided in said second subassembly extending between said second cap (18) and a coupling configuration (14) on said second on said second piston (6) to maintain the position of the latter during telescoping of the shell vial relative to the plunger.

# SUBSTITUTE SHEET


- 3. A syringe system according to claim 1, characterized in that the shell vial (4) is of a diameter to telescope around said plunger (16), and said means (17) on the plunger for coupling to the coupling configuration of the first piston (32) are initially coupled to coupling means (14) on the second piston (6).
- 4. A syringe according to claim 3, characterized in that the components of the second subassembly (3) are assembly within a tubular housing (40), and the shell vial (4) is a press fit within the tubular housing.
- 5. A syringe system according to any one of claims 1-4, characterized in that the cannula means (20) is a double ended needle, with a flange (24) to control its longitudinal position received within the second cap (18).

# SUBSTITUTE SHEET

1/4

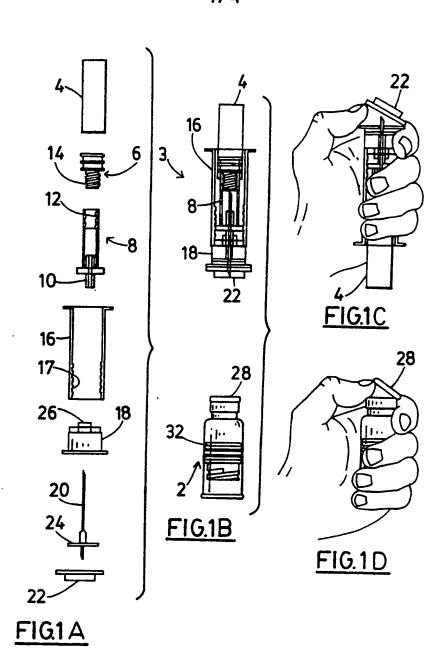


PCT/CA92/00495

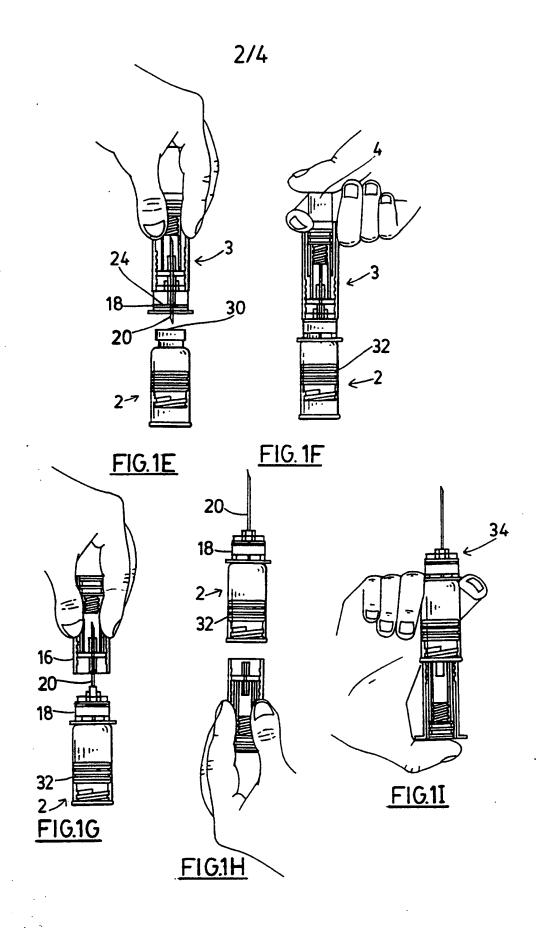


ß


.


PCT/CA92/00495

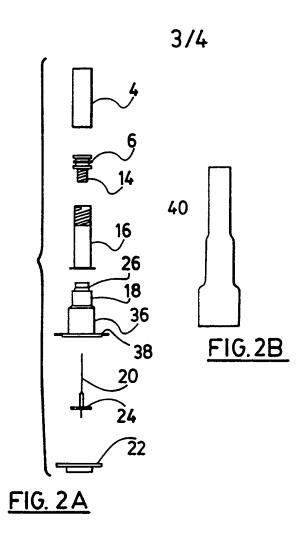

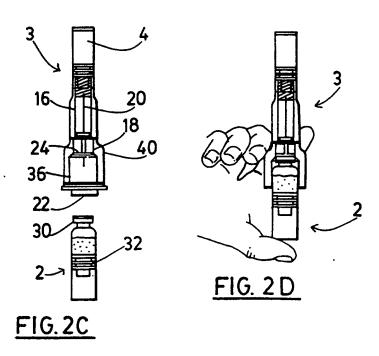

PCT/CA92/00495

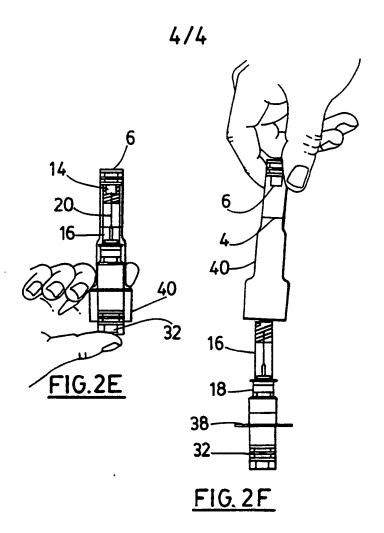



PCT/CA 92/00495

International Application No

I. CLASSI	FICATION OF SUBJ	ECT MATTER (If several classification	n symbols apply, indicate all) <sup>6</sup>	····					
		Classification (IPC) or to both Nationa							
Int.C1	. 5 A61M5/28	, ,							
1									
II. FIELDS SEARCHED									
<b></b> -		Minimum Doca	umentation Searched?						
Classification System Classification Symbols									
Int.Cl	. 5	A61M; A61J							
:									
	;	Documentation Searched oth	ner than Minimum Documentation						
		to the Extent that such Documen	its are Included in the Fields Searched <sup>8</sup>						
III. DOCU		D TO BE RELEVANT							
Category °	Citation of De	ocument, 11 with indication, where appro	priate, of the relevant passages 12	Relevant to Claim No.13					
	50.4.0	noo for (DUOJEST MEDI	ALL EVETENC	1 0 5					
۸	INC)	298 585 (DUOJECT MEDI	UAL SYSTEMS	1,2,5					
		ary 1989							
		whole document							
A,P		5 137 511 (REYNOLDS)							
	cited i	the application							
A	DE.A.1	766 151 (FARBENFABRIKE	EN BAYER AG)	1					
	3 June :	1971	<u>.</u>						
	see cla	ims; figure 2							
	IIC A A A	 124 057 (UDUCE)		1					
٨		124 057 (HOUSE) ry · 1984		*					
		ims; figures							
٨	US,A,4 (	)14 330 (GENESE)		1					
		ims; figures							
	Jee era								
	<u> </u>	10							
	il categories of cited doc	cuments: "V eral state of the art which is not	"T" later document published after the internal or priority date and not in conflict with the	e application but					
CO	asidered to be of particu	lar relevance	cited to understand the principle or theor invention	A greening me					
fili	ing date	shed on or after the international	"X" document of particular relevance; the clai cannot be considered novel or cannot be						
		v doubts on priority claim(s) or the publication date of another	involve an inventive step "Y" focument of particular relevance; the clai	med invention					
	ation or other special re	ason (as specified) oral disclosure, use, exhibition or	cannot be considered to involve an invent document is combined with one or more of	ive step when the					
oti	ber means		ments, such combination being obvious to in the art.						
	cument published prior ( er than the priority date	to the international filing date but e claimed	"&" document member of the same patent fan	nily					
IV. CERTI	FICATION		<del></del>	<del></del>					
		he International Search	Date of Mailing of this International Sear	ch Report					
	•	ICH 1993		•					
	11 1///	ICH 1333		1 6. <i>0</i> 3. 93					
Internationa	al Searching Authority		Signature of Authorized Officer						
	EUROPEA	N PATENT OFFICE	SEDY R.						
			Ī						

Ç

# ANNEX TO THE INTERNATIONAL SEARCH REPORT ON INTERNATIONAL PATENT APPLICATION NO.

9200495 CA 66152 SA

This amore lists the patent family members relating to the patent documents cited in the above-mentioned international search report.

The members are as contained in the European Patent Office EDP file on

The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

11/03/93

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
EP-A-0298585	11-01-89	US-A- AU-B- CA-A- GB-A- JP-A- US-A-	4886495 623594 1295525 2210268 1131671 5137511	12-12-89 21-05-92 11-02-92 07-06-89 24-05-89 11-08-92
DE-A-1766151	03-06-71	None		
US-A-4424057	03-01-84	None		
US-A-4014330	29-03-77	AU-B- AU-A- BE-A- CA-A- CH-A- DE-A- FR-A, B GB-A- NL-A- SE-B- SE-A-	500379 1810176 847695 1058035 612350 2648795 2329296 1562637 7611905 428264 7611963	17-05-79 06-04-78 27-04-77 10-07-79 31-07-79 03-11-77 27-05-77 12-03-80 02-05-77 20-06-83 30-06-77